


**Model: NZ6W**

T/S Parameters			Magnet and Voice Coil Properties		
Normal Impedance	Znom	4 ohm	Magnet size		90mm*20mm
DC resistance	Re	3.85 ohm	Voice coil diameter	Dc	25.5 mm
Voice coil inductance	Le	0.68 mH @1kHz	Winding height	Hc	17 mm
Resonance frequency	Fs	37Hz	Linear excursion P-P	Xm	12mm
Mechanical Q factor	Qms	2.3	Max excursion P-P		25mm
Electrical Q factor	Qes	0.77	Normal long term Power	Pnom	40 W
Total Q factor	Qt	0.58	Instant(10ms) Max Power	Pmax	80 W
Moving mass(incl.air load)	Mms	19g	Other Properties		
Suspension compliance	Cms	1.1 mm/N	Sound Pressure Level/1m/1W	SPL	84.5 dB
Effective dome diameter	d	12.8 cm	Recommended range		35-5000 Hz
Effective piston area	Sd	128.7 sq.cm	Net. weight		1.4 kg
Equivalent volume	Vas	25L	Overall dimension		Φ166*80 mm
Force factor	Bl	4.7Tm			

**Frequency response graph**

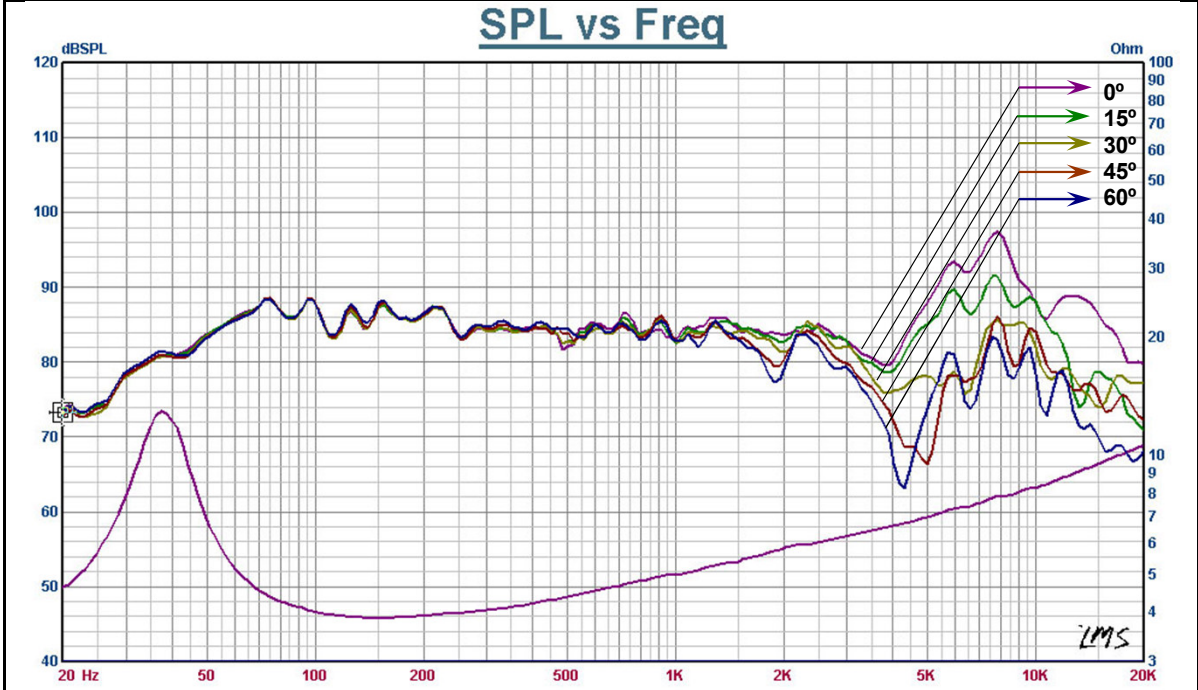

**Impedance curve**

